



PRESSURE TANKS & ACCESSORIES



CHALLENGER™ SERIES
PRESSUREWAVE™ SERIES
C2-LITE CAD™ SERIES
SUPERFLOW™ SERIES
GWS ENERGY SAVER
ACCESSORIES



■ PressureWave™ Series

PressureWave™ diaphragm pressure tanks are ideally suited for a wide range of general applications including pump booster systems, thermal expansion, irrigation systems, and to minimise water hammer.

- Single diaphragm design 100% potable quality butyl
- Patented 316 stainless steel connection
- Virgin polypropylene liner, so no water touches plain steel
- Internal clench ring becomes more secure at higher pressures
- Appliance quality two part polyurethane, epoxy primed paint finish - almond
- Brass stemmed air valve and o-ring sealed valve cap
- NSF standard 61, CE/PED, WRAS approvals
- Pre-charged air side 28 PSI/1.9 Bar
- Maximum temperature up to 90°C
- Standard maximum pressure 150 PSI/10 Bar
- Models available up to 235 PSI/16 Bar
- **5 year replacement warranty**



FLE-PWB8V



FLE-PWS20H



FLE-PWB60V

10 BAR DOMESTIC COMMERCIAL PRESSURE WAVE TANKS

Model	Actual Capacity (litres)	Nominal Draw-off (litres)	Recommended Max. Working Pressure	Connection BSP (inches)	Dimensions (mm x mm)
FLE-PWB2V	2	0.6	10 Bar	1	127 x 183
FLE-PWB8V	8	3	10 Bar	1	203 x 317
FLE-PWB18V	18	6	10 Bar	1	279 x 368
FLE-PWB60V	60	22	10 Bar	1	388 x 554
FLE-PWB80V	80	29	10 Bar	1	388 x 787

10 BAR HORIZONTAL TANKS

FLE-PWS20H	20	8	10 Bar	1	289 x 444
FLE-PWS60H	60	22	10 Bar	1	414 x 528

16 BAR INDUSTRIAL HIGH PRESSURE TANKS

FLE-PWB8V-16	8	3	16 Bar	1	203 x 317
FLE-PWB18V-16	18	6	16 Bar	1	279 x 350
FLE-PWB80V-16	80	29	16 Bar	1	388 x 787

Accessories

BRAIDED CONNECTION KITS

DAB-20HCONN	3/4" 90 deg F+20H Adaptor x 1" M x 500mm
DAB-60HCONN	1" 90 deg F x 1" M x 600mm
DAB-100HCONN	1" 90 deg F x 1" M x 700mm
DAB-200HCONN	1" F x 1" M x 800mm

STAINLESS STEEL BRAIDED CONNECTION KITS

FLE-700MFCKIT	1" F x 1" M x 700mm
FLE-700MFECKIT	1" 90 deg F x 1" M x 700mm
FLE-800MFCKIT	1" F x 1" M x 800mm
FLE-800MFECKIT	1" 90 deg F x 1" M x 800mm
FLE-1000MFCKIT	1" F x 1" M x 1000mm
FLE-1000MFECKIT	1" 90 deg F x 1" M x 1000mm



■ Challenger™ Series



Challenger™ diaphragm pressure tanks are ideally suited for a wide range of general applications including; pump booster systems, thermal expansion, irrigation systems, and to minimise water hammer.

- Patented Controlled Action Diaphragm CAD Design, 100% potable quality butyl
- Patented 316 stainless steel elbow connection
- Connection includes a diffuser to suspend any solids and prevent clogging
- Internal clench ring becomes even more positive at higher pressures
- Double diaphragm reduces condensation due to 'air buffer' design
- Appliance quality two part polyurethane, epoxy primed paint finish, almond
- Brass stemmed air valve and o-ring sealed valve cap
- NSF Standard 61, CE/PED, WRAS approvals
- Pre-charged air side 38 PSI/2.6 Bar
- Maximum temperature up to 90°C
- Standard maximum pressure 150 PSI/10 Bar
- **5 year replacement warranty**



Model	Actual Capacity (litres)	Nominal Draw-off (litres)	Recommended Max. Working Pressure	Connection BSP (inches)	Dimensions (mm x mm)
FLE-C100V	100	36	10 Bar	1	406 x 876
FLE-C130V	130	46	10 Bar	1	406 x 1085
FLE-C170V	170	62	10 Bar	1	533 x 920
FLE-C240V	240	86	10 Bar	1	533 x 1219
FLE-C310V	310	113	10 Bar	1	533 x 1574
FLE-C450V	450	165	10 Bar	1	660 x 1504

■ GWS Energy Saver



Conventional electronic household water pressure systems do not have water pressure storage tanks which means that they will start immediately when the pressure drops below 150kPa.

This means that regardless of the amount of water you use, from a dripping tap to a cup of water the pump will start every time until you fix the leak or turn the tap off, then the pump will run for 10 seconds before turning off. Flushing the toilets, dripping taps, drip irrigation, roof top evaporative coolers, leaking taps, hot water systems all cause pumps to short cycle reducing pump life and using excessive amounts of electricity.


The GWS Energy Saver stores approximately 8 litres of water depending on pump pressure which dramatically reduces pump starts, i.e.: you can turn the tap on 20 times to fill 20 cups of water and the pump will not start.

- Quick and easy installation
- Kit comprises of an electronic control, 20 litre tank, hose connection, thread tape and installation instructions (pump sold separately)
- Saves power costs

No Maintenance - No Worries

■ C2-Lite CAD™ Series

C2 CAD™ diaphragm pressure tanks are ideally suited for a wide range of general applications including pump booster systems, thermal expansion, irrigation systems, and to minimise water hammer. Additionally they are corrosion resistant and lightweight.

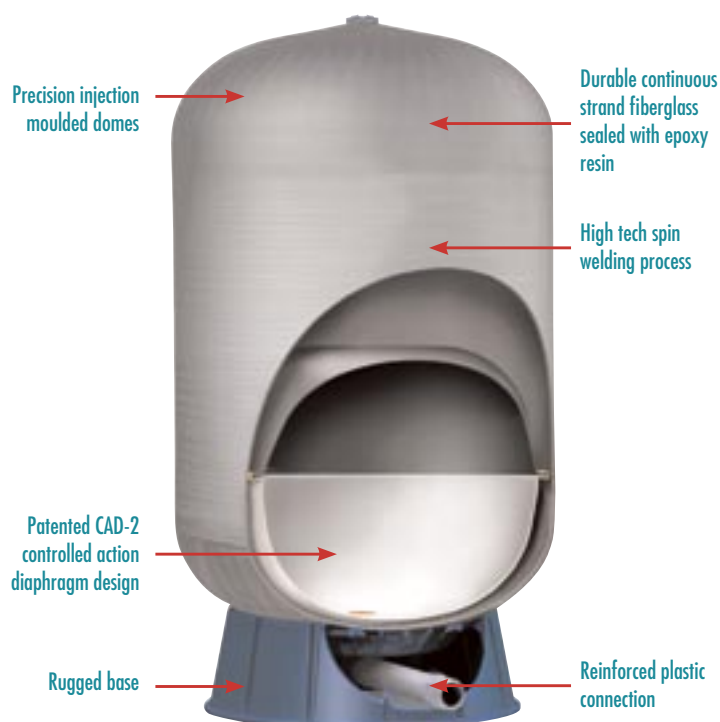

- Lightweight non-corroding scratch resistant construction
- Precision injection moulded copolymer polypropylene domes
- Reinforced with durable continuous strand fibreglass
- Sealed with epoxy resin
- Rugged injection moulded ABS base
- Patented CAD-2 Controlled Action Diaphragm, 100% potable quality butyl
- Precision moulded copolymer polypropylene liner
- Connection includes a diffuser to suspend any solids and prevent clogging
- Internal clench ring becomes even more positive at higher pressures
- Double diaphragm reduces condensation due to 'air buffer' design
- Brass stemmed air valve and o-ring sealed valve cap
- Pre-charged air side 38 PSI/2.6 Bar
- Reinforced base mounted plastic connection
- Maximum temperature up to 60°C
- Standard maximum pressure 150 PSI/10 Bar
- **5 year replacement warranty**

Model	Actual Capacity (litres)	Nominal Draw-off (litres)	Recommended Max. Working Pressure	Connection BSP (inches)	Dimensions (mm x mm)
FLE-C2B-80	80	29	10 Bar	1	418 x 852
FLE-C2B-100	100	36	10 Bar	1	418 x 967
FLE-C2B-130	130	46	10 Bar	1	418 x 1227
FLE-C2B-200	200	72	10 Bar	1	542 x 1098
FLE-C2B-250	250	90	10 Bar	1	542 x 1303




FLE-PWSA3 & FLE-PWSA3TEE

■ Water Hammer Arrestor

WATER HAMMER ARRESTOR					
Model	Actual Capacity (litres)	Nominal Draw-off (litres)	Recommended Max. Working Pressure	Connection BSP (inches)	Dimensions (mm x mm)
FLE-PWSA3	0.3	0.1	10 Bar	1/2	114 x 85
FLE-PWSA3TEE	1/2" Brass compression Tee to suit				
FLE-SP2	Smart valve				

- **5 year replacement warranty**



■ Superflow™ Series

SuperFlow™ interchangeable diaphragm high pressure tanks are ideally suited for a wide range of larger applications including pump booster systems, irrigation systems, high pressure systems and to minimise water hammer.

- Durable interchangeable tiered construction membrane
- Up to 1500 litres volume 100% EPDM diaphragm, maximum temperature up to 100°C
- From 2000 – 15000 litres volume 100% butyl diaphragm maximum temperature up to 70°C
- All models complete with integral pressure gauge for convenience
- High quality polyurethane paint over rugged steel construction - green
- Reinforced tripod legs for easy installation
- Pre-charged air side 150 PSI/10 Bar
- Standard model maximum pressure up to 235 PSI/16 Bar
- Premium model maximum pressure up to 365 PSI/25 Bar
- 1 year membrane replacement warranty



SuperFlow SF300-16V

Model	Actual Capacity (litres)	Nominal Draw-off (litres)	Recommended Max. Working Pressure	Connection BSP (inches)	Dimensions (mm x mm)
FLE-SF2425V	24	9	25 Bar	1	260 x 445
FLE-SF6025V	60	22	25 Bar	1	380 x 780
FLE-SF10025V	100	36	25 Bar	1	460 x 935



Comparing a Diaphragm Tank to a Wet Tank (According to Boyle's Law)

The key data required is the pump flow rate and the pressure switch settings.

Tank drawdown of 1 – 2 minutes is recommended to minimise the 'short cycle' wear and tear caused to pipes, pump ends and motors by starting & stopping too frequently. Undersized tanks and automatic pump controllers are notorious for the decrease in longevity and performance they cause.

Example: Size a large house pressure tank to suit the DAB-Eurinox 50/50 MP

$V_F = 50$ LPM = 50 Litres draw off volume

(minimum 1 minute between pump starts)

P_A = Atmospheric Pressure = 14.7 PSI

P_1 = Pre-Charge Tank Air Pressure = 68 PSI (NB: wet tank $P_1 = 0$)

P_2 = Cut-in Pressure = 70 PSI

P_3 = Cut-out Pressure = 90 PSI

D_F = Draw Down Coefficient

T_V = Pressure Tank Volume

$$D_F = \frac{(P_1 + 14.7)}{(P_2 + 14.7)} - \frac{(P_1 + 14.7)}{(P_3 + 14.7)}$$

$$T_V = \frac{V_F}{D_F}$$

Wet Tank Example

$$\begin{aligned} D_F &= (14.7 / 84.7) - (14.7 / 104.7) \\ &= (0.174) - (0.140) \\ &= 0.034 \end{aligned}$$

$$\begin{aligned} T_V &= (50 / 0.034) \\ &= 1470 \text{ litre tank volume} \end{aligned}$$

Diaphragm Tank Example

$$\begin{aligned} D_F &= (82.7 / 84.7) - (82.7 / 104.7) \\ &= (0.976) - (0.790) \\ &= 0.186 \end{aligned}$$

$$\begin{aligned} T_V &= (50 / 0.186) \\ &= 270 \text{ litre tank volume} \end{aligned}$$

Available from:



CE ISO9001



WHITE INTERNATIONAL PTY LTD
A.B.N. 48 000 119 380
52-60 Ashford Ave, MILPERRA NSW 2214
SYDNEY, AUSTRALIA
Ph 9783 6000 Fax 02 9783 6001
CUSTOMER SERVICE HOTLINE 1300 783 601
CUSTOMER SERVICE FAXLINE 02 9783 6003

WEBSITE: www.whiteint.com.au
EMAIL: Sales enquiries: sales@whiteint.com.au
General info enquiries: info@whiteint.com.au

WHITE INTERNATIONAL NZ LTD
138 Hugo Johnston Drive,
PENROSE, AUCKLAND, NEW ZEALAND
Ph 09 579 9777 FAX 09 579 7775
CUSTOMER SERVICE HOTLINE 0800 509 506
CUSTOMER SERVICE FAXLINE 0800 804 344

WEBSITE: www.whiteint.co.nz
EMAIL: Sales enquiries: sales@whiteint.co.nz
General info enquiries: info@whiteint.co.nz

Disclaimer: Every effort has been made to publish the correct details in this brochure. No responsibility will be taken for errors, omissions or changes in product specifications.